



# RASA

NATURALIS COLLECTIONS





## NATURALIS COLLECTIONS

WHETHER YOU ARE A TRUE BELIEVER IN THE GREEN MOVEMENT OR
YOU'RE JUST PASSIONATE IN BRINGING THE BEAUTY OF NATURE INTO
YOUR HOME, THERE'S NO DENYING THE APPEAL OF NATURAL
MATERIALS IN INTERIOR DESIGN.

NATURALIS, A BEAUTIFUL COLLECTION OF PORCELAIN TILE DESIGNS
INSPIRED BY NATURAL STONE. GORGEOUS AND EXTREMELY DURABLE,
STONE-LOOK TILE IS DEFINITELY A SMART CHOICE FOR FLOORS AND
WALLS, AND VERY EASY TO TAKE CARE OF AS WELL. WITH ITS FINE
VARIETY OF MODERN DESIGNS AND SIZES, NATURALIS IS SURE TO ADD
AN ELEGANT TOUCH TO ANY DÉCOR SCHEME.


BY WIFI CERAMICS



OUT OF ALL THE NATURAL MATERIALS AVAILABLE ON OUR PLANET,
TIME HAS PROVEN STONE TO BE THE MOST RESILIENT, LUXURIOUS
AND LONG LASTING OF THEM ALL. HOWEVER LUXURY DOES COME
WITH A HEFTY PRICE.

INTRODUCING RASA, A FINE LOOKING SERIES THAT EFFORTLESSLY EXUDES THE LUXURY YOU'RE LOOKING FOR WITHOUT BREAKING THE BANK. RASA'S TRUE DEPICTION OF NATURAL STONE ALLOWS IT TO BLEND SEAMLESSLY WITH YOUR INTERIORS TO CREATE A CONTEMPORARY SPACE THAT FEELS NATURAL, UNIQUE AND WELL DESIGNED.

BY WIFI CERAMICS

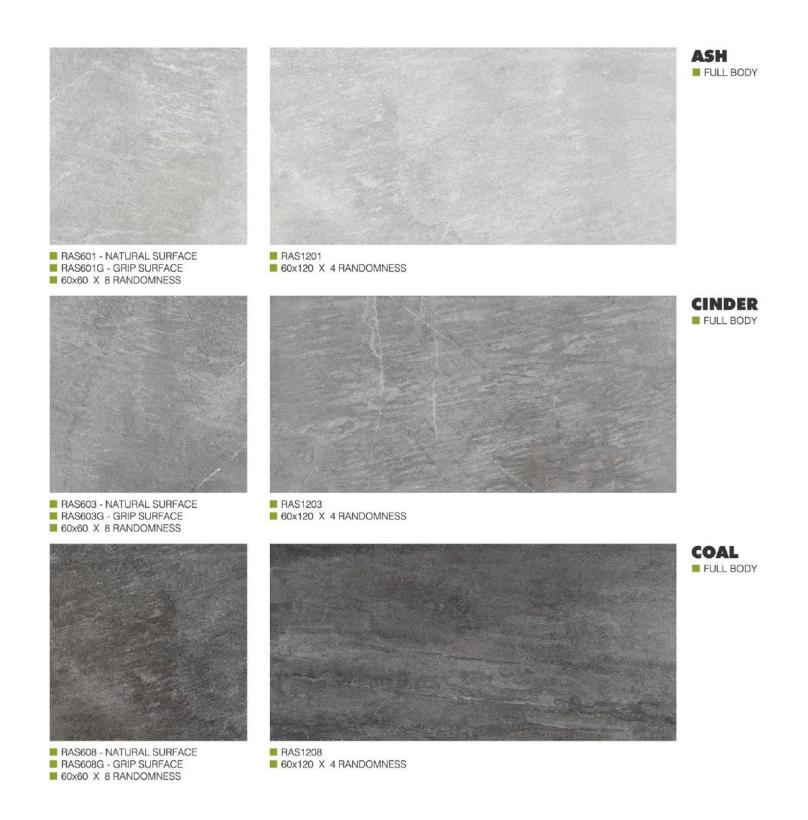





#### **ASH**

With a colour so serene, Ash is a great pick to increase the value of your home with a material that is sophisticated, easy to maintain and durable.

- RAS601 NATURAL SURFACE
- RAS601G GRIP SURFACE
- 60x60 X 8 RANDOMNESS
- RAS1201 NATURAL SURFACE
- 60x120 X 4 RANDOMNESS















#### **ASH**

Reading nooks, bedrooms and living spaces are popular spots to make the most of this highly attractive tile colour.

- RAS601 NATURAL SURFACE RAS601G GRIP SURFACE 60x60 X 8 RANDOMNESS
- RAS1201 NATURAL SURFACE
  60x120 X 4 RANDOMNESS









#### CINDER

Cool yet comforting, Cinder brings a splash of contemporary goodness to your dull, dated interiors. It's time for a fresh, new beginning.

- RAS603 NATURAL SURFACE ■ RAS603G - GRIP SURFACE ■ 60x60 X 8 RANDOMNESS
- RAS1203 NATURAL SURFACE
  60x120 X 4 RANDOMNESS















#### CINDER

Cinder can be used on any floor and wall to beautifully compliment the other materials in the room.

- RAS603 NATURAL SURFACE
- RAS603G GRIP SURFACE
  60x60 X 8 RANDOMNESS
- RAS1203 NATURAL SURFACE
- 60x120 X 4 RANDOMNESS









#### COAL

Dark, moody colours with understated drama is taking centre stage these recent years as this trend celebrates maximalism and the eclectic style – Coal fits in perfectly.

- RAS608 NATURAL SURFACE RAS608G GRIP SURFACE 60x60 X 8 RANDOMNESS
- RAS1208 NATURAL SURFACE
  60x120 X 4 RANDOMNESS
















#### COAL

With its intense colour and ultra modern appeal, Coal acts as a great backdrop for light and dark furniture pieces, allowing them to shine.

- RAS608 NATURAL SURFACE RAS608G GRIP SURFACE 60x60 X 8 RANDOMNESS

- RAS1208 NATURAL SURFACE
  60x120 X 4 RANDOMNESS

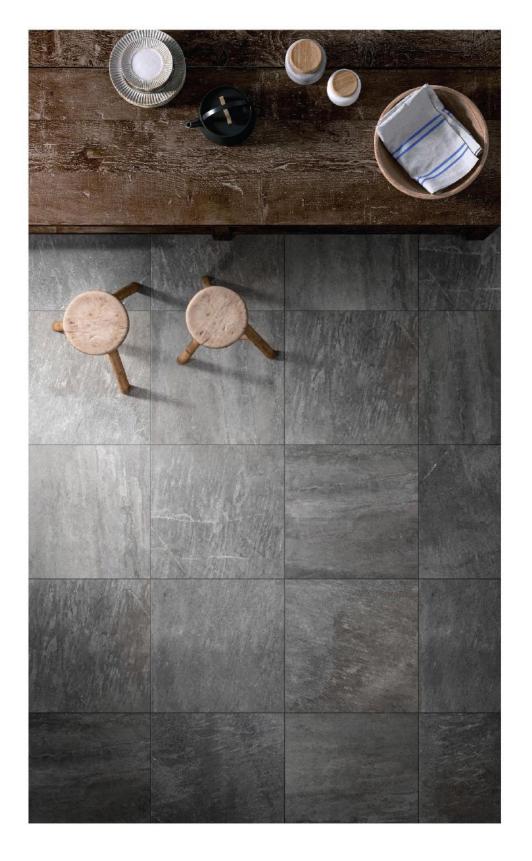




### **INSTALLATION TIPS**

- O1 Inspect all product prior to installation for any visible defects or unacceptable colour/shade variation. Claims are not accepted after installation.
- 02 A 1/4" square-notched trowel is suggested for applying the thin-set.
- O3 Before grouting, allow the mortar base to dry for 24 to 48 hours.
- O4 The tiles can be cleaned with clear water and/or a neutral liquid cleaner. Apply the cleaning solution to the properly installed tile using a cloth mop or non-abrasive towel. Follow the application with a clear water rinse and wipe dry to prevent film formation.
- O5 Sealing the tile is not recommanded, and acid cleaning the tile may result in substantial harm to the product; therefore if either of these applications are performed it will specifically void the warranty.
- 06 INSTALLATION OF RECTANGULAR TILES:

Staggered space should be kept within 10cm to 15cm (For 10cm X 60cm, 15cm X 60cm, 20cm X60cm, 30cm X 60cm, and 47cm X120cm rectangular tiles to compensate for the warpage of rectangular tiles.

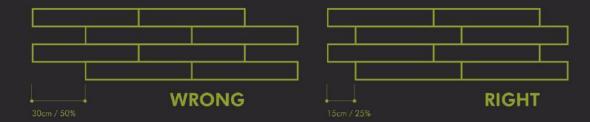



#### **TECHINICAL SPECIFICATIONS**

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	ISO STANDARD REQUIREMENT	<b>WI</b> Fi
Length & Width	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Thickness	ISO 10545 - 2	nvm	± 5.0% Max	± 5.0% Max
Sides Straightness	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Rectangularity	ISO 10545 - 2	mm	± 0.6% Max	± 0.6% Max
Fatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545 - 2 ISO 10545 - 2 ISO 10545 - 2	mm mm mm	± 0.5% Max ± 0.5% Max ± 0.5% Max	± 0.5% Max ± 0.5% Max ± 0.5% Max
Surface Quality	ISO 10545 - 2	One major area of tiles	≥ 95% free from visible defect	≥ 95% free from visible defect
Water Absorption	ISO 10545 - 3			≤ 0.5%
Modulus of Rupture	ISO 10545 - 4	N/mm2	≥ 35N/mm2	≥ 35N/mm2
Deep Abrasion	ISO 10545 - 6			≤ 175 mm3
Surface Abrasion PEI ASTM C1027	ISO 10545 - 7	Visual Check	Manuf. to state Abrasion Class, Cycle Passed	Manuf: to state Abrasion Class, Cycle Passed
Crazing Test	ISO 10545 - 11	Visual Check	Not Applicable for porcelain files	Not Applicable for porcelain tiles
Frost Resistance	ISO 10545 - 12	Visual Check	Required	Required
Chemical Resistance (Low Cons.)	ISO 10545 - 13	Visual Check	Manuf. to state	Manuf. to state
Chemical Resistance (Household/Swimming Pool)	ISO 10545 - 13	Visual Check	Max Visible Change On Cut Side	Max Visible Change On Cut Side
Stain Resistance		Visual Check		Class 3 Min
Coefficient of Friction	ISO 10545 - 17	Manuf, to state	Manuf. to state	Manuf, to state

Each different tiles series is produced to meet different performance requirements. For specific product technical performance, please request from WIFi sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.



No. 13-17, Building A16, International Ceramics and Sanitary Ware City, Jihua West Road, Nanzhuang Town, Chancheng District, Foshan City Guangdong Province, China.

+86-757-8252 5001

info@wificeramics.com

www.wificeramics.com